



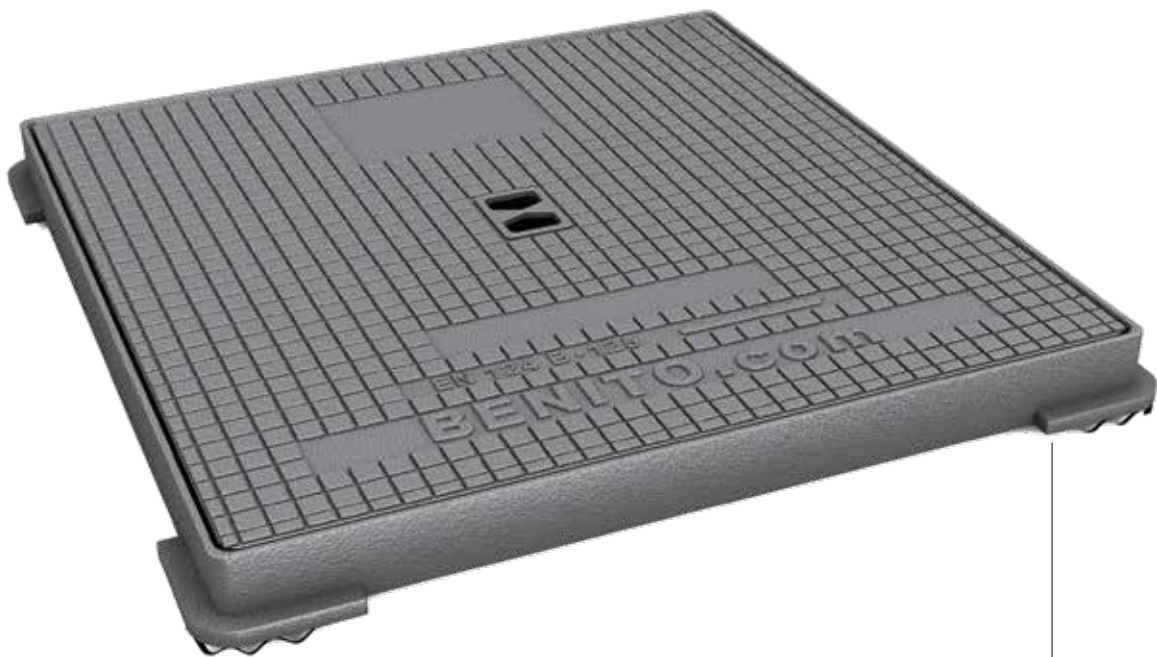


Hidra B1

TH40



Patas de agarre para una mejor sujeción
Pates d'amarrage pour une meilleure fixation
Anchoring rims for an easy installation



REF.		A	B	H	C	D	P	P1	UN.
TH25	B125	275 mm	275 mm	35 mm	230 mm	230 mm	195 mm	195 mm	200
TH30	B125	325 mm	325 mm	35 mm	285 mm	285 mm	245 mm	245 mm	180
TH40	B125	425 mm	425 mm	35 mm	390 mm	390 mm	345 mm	345 mm	80
TH50	B125	520 mm	520 mm	35 mm	480 mm	480 mm	435 mm	435 mm	80
TH60	B125	625 mm	625 mm	40 mm	580 mm	580 mm	535 mm	535 mm	25
TH70	B125	750 mm	750 mm	45 mm	680 mm	680 mm	635 mm	635 mm	20
TH80	B125	850 mm	850 mm	45 mm	780 mm	780 mm	715 mm	715 mm	20
TH90	B125	940 mm	940 mm	45 mm	870 mm	870 mm	805 mm	805 mm	20



TH70 - TH80 - TH90

Hidra B1 está diseñada para soportar un paso peatonal. Especialmente en aceras o superficies similares.

- Realizada en fundición dúctil, en grafito esferoidal, según ISO 1083 (Tipo 500-7) y norma EN 1563.
 - Cumple con la norma europea UNE EN-124.
 - Cierre por peso.
 - Hendidura para facilitar su apertura.
 - Superficie metálica antideslizante.
- Revestida con pintura negra, no tóxica, no inflamable y no contaminante.

Hidra B1 est conçu pour supporter un trafic piéton. Notamment sur trottoirs ou surfaces similaires.

- Fabriqué en fonte ductile à graphite sphéroïdal, conformément aux normes ISO 1083 (Type 500-7) et EN 1563.
 - Conforme à la norme européenne UNE EN-124.
 - Fermeture par son propre poids.
 - Fente d'ouverture facile.
 - Surface métallique antidérapante.
- Revêtement en peinture noire, non toxique, ininflammable et écologique.

Hidra B1 is designed to support pedestrian traffic. In particular, pavements or similar surfaces.

-
- Made from spheroidal graphite ductile cast iron, according to ISO 1083 (Type 500-7) and standard EN 1563.
- Compliant with the European standard UNE EN-124.
- Weight closure.
- Groove to facilitate the opening process.
- Metal non-slip surface.
- Coated with non-toxic, non-flammable and non-polluting water-soluble black paint.